

**Altai A2e WiFi Access Point/Bridge**

The A2e WiFi Access Point/Bridge is designed to be used in Altai Super WiFi systems as high capacity directional access point and long range-bridge with flexible external high gain antennas. It is capable of providing the highest possible data throughput and capacity that the 802.11n standards can offer.



**Super Long Bridging Distance**

LOS Access	900 m
LOS Bridge	50 km
Data Rate	300 + 300 Mbps

**Altai A2e for Super Long Range Backhaul**

The A2e 5 GHz radio provides 2 external antenna ports connection which allows user to choose exactly the antenna gain they wanted for a particular distance and throughput requirement, and the type of panel or sector antenna they wanted for point-to-point or point-to-multi-point applications.

**Point-to-Multi-Point Bridging**

Besides the A2e to A2e PTP long range bridging uses, the A2e also supports PTMP bridging with A2/A2e, fulfilling high throughput, high user capacity and fully IP-67 weatherproof requirements. This is commonly used for hub site bridging such as campus network, city network or surveillance.

**Altai A2e for 5 GHz Wireless Access**

The A2e can be used for 5 GHz wireless access for applications such as wireless broadband or surveillance. It is a cost effective solution when worked with the Altai C1an CPE supporting a distance as far as 2 km without costly cabling.




**Altai A2e for Micro Sector Coverage**

The A2e can be used as a standalone access point for directional coverage. With built-in 2.4 GHz high gain panel antenna, it can be used to provide simple and cost effective long range sector coverage. The single-sided coverage makes installation simple by just mounting at building wall side.

**Altai A2e for System Capacity**

As the system capacity of an A8n network needs to be increased, the A2e Access Point can be used to double the user capacity at low cost. The A2e can be installed exactly where the capacity requirement is the greatest.

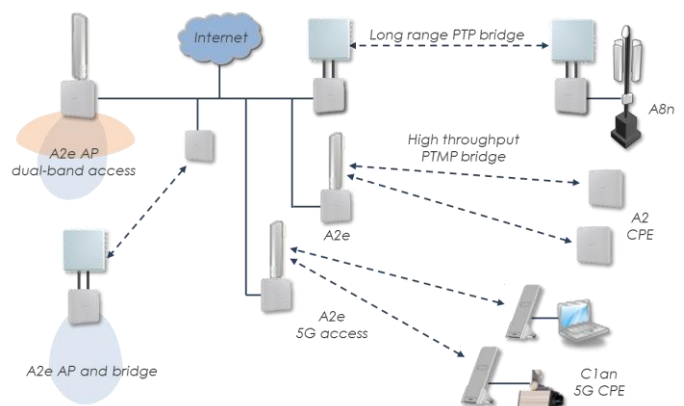

**As an integral part of our Super WiFi network infrastructure, key benefits of the Altai A2e include:**

- Built-in 2.4 GHz high gain panel antenna for high capacity directional AP applications
- External 5 GHz high gain panel antenna for long range high throughput PTP/PTMP bridging
- 2 x 2 MIMO for both 2.4 GHz (802.11b/g/n) and 5 GHz (802.11a/n) radios
- 2.4 and 5 GHz Dual-band concurrent access
- IP-67 rated carrier grade product for both outdoor and indoor applications
- Increase system capacity under the coverage area of A8n Super WiFi Base Station
- Gigabit Ethernet or 2 x 2 802.11a/n wireless backhaul
- PTP and PTMP bridging with optional external dual slant panel or omni antennas
- Light weight with built-in lightning protection
- Multi-operating modes allowed: AP, bridge, repeater mode or CPE

## Wireless Interface

### 802.11b/g/n (2x2) Radio

- Operating Mode AP/ CPE/ Bridge/ Repeater
- Standard IEEE 802.11b/g/n
- Operating Frequency 2.400 – 2.484 GHz (Ch 1-13)
- Transmit Power 30 dBm (Max.)  
27 dBm (Per Chain)
- Receiver Sensitivity (Typical)
 

802.11b	11 Mbps	-91 dBm
	1 Mbps	-97 dBm
802.11g	54 Mbps	-78 dBm
	6 Mbps	-95 dBm
802.11n	HT20	-95 dBm
	HT40	-92 dBm

### 802.11a/n (2x2) Radio

- Operating Mode AP/ CPE/ Bridge/ Repeater
- Standard IEEE 802.11a/n
- Operating Frequency 5.150 – 5.350 GHz  
5.470 – 5.725 GHz  
5.725 – 5.850 GHz
- Transmit Power 30 dBm (Max.)  
27 dBm (Per Chain)
- Receiver Sensitivity (Typical)
 

802.11a	54 Mbps	-78 dBm
	6 Mbps	-94 dBm
802.11n	HT20	-94 dBm
	HT40	-91 dBm

### For both 2.4 and 5 GHz

- 32 SSID (Max. 16 SSID per Radio)
- WDS
- Altai AirFi™ Throughput Optimization
- Band Steering
- Automatic Channel Selection (with Scheduling)
- WMM

## Antenna

### 2.4 GHz Antenna

- Built-in Antenna 13 dBi Flat Panel
- Frequency 2.4 – 2.5 GHz
- Polarization Dual Slant ±45°
- Horizontal Beamwidth 37° (-3 dB)
- Vertical Beamwidth 33° (-3 dB)
- VSWR 2 (Max.)
- Impedance 50 Ω
- Front-to-back Ratio -20 dB (Max.)
- Isolation Between Ports 20 dB (Min.)

### 5 GHz Antenna (Optional Accessories)

- External Antenna 20 dBi Panel/ 9 dBi Omni/  
16 dBi 100° Sector
- Antenna Connector 2 x N-female

## Networking

- VLAN
- IPv4/ IPv6 Dual-stack
- Switch (Bridge) and Gateway Mode
- DHCP Client/ Server
- NAT
- PPPoE Client
- Bandwidth Control Per VAP/ Client
- Multicast Rate Filter/ IGMP Snooping

## Security

- Authentication – Open system, Shared key, WPA/ WPA-PSK, WPA2/ WPA2-PSK, 802.1x (EAP-PEAP/ TLS/ TTLS/ SIM/ AKA)
- Encryption – WEP, TKIP, AES
- RADIUS Client (PAP, CHAP)
- RADIUS Accounting
- Inter/ Intra-client Isolation
- MAC-based Access Control (White/ Black List)
- SSID Suppression
- WAPI

## Management

- Cloud-based Management by AltaiCare
- Server-based Management by AWMS
- Controller-based Management by Access Controller
- Web User Interface
- Command Line Interface (SSH)
- 3-level User Login
- Remote Firmware Upgrade (HTTP, TFTP)
- SNMP v1/ v2c
- MIB2/ IF-MIB/ Altai Enterprise MIB
- Performance Statistics/ Alarm Information Display
- WiFi Client Association/ Disassociation Statistics
- Syslog

## Physical Specification

- Dimension 220 x 220 x 60 mm
- Weight 1.3 kg (Unit Weight) /  
4.4 kg (Gross Weight)
- Mounting Pole or Wall-mounted
- Network Interface 10/100/1000 Mbps Ethernet Port

## Power Supply

- Power Source PoE Injector (56 V), 802.3at  
Compliant, Optional -48V DC
- Power Consumption 10 W (Typical) / 20 W (Max.)

## Environmental Specification

- Operating Temperature -40 °C to +60 °C (Ambient)  
0 °C to +40 °C (PoE Injector)
- Storage Temperature -40 °C to +80 °C
- Humidity 5 to 100% (Condensing)
- Lightning Protection EN 61000-4-5
- Wind Loading Up to 216 km/h (134 mph)
- Weatherproof IP67 Compliant

## Certification

- FCC/ CE/ Others

## Product Ordering Information

### Standard Package

- A2e WiFi Access Point / Bridge with Built-in 2.4 GHz Panel Antenna (Model No.: AP5822)
- PoE Injector and Mounting Accessories
- 5 GHz Omni/ Panel/ Sector Antennas (Optional)

### Contact Us

- Email: sales@altaitechnologies.com

\* Will be available in future. A2e-PB-150428  
 The coverage range will be varied depending on NLOS and interference conditions.  
 The transmit power may be varied according to country regulation.  
 Although Altai has attempted to provide accurate information in these materials,  
 Altai assumes no legal liability for the accuracy and completeness of the information.  
 All specifications are subject to change without notice.